Caframo® Lab**Solutions**

3030 Universal

Accommodate changing application needs with power and control offered in Caframo's Universal significant torque and speed capabilities. A great fit for viscous mixing at higher speeds.

High performance brushless DC motor provides maintenance free operation. Track a change in viscosity throughout the mixing process with the unique torque zero feature. The Universal offers versatile features for success in a range of applications.

Key Specifications:

Speed Range

Max Torque

Max Viscosity

Output Power


Max Volume

- 20 3000 rpm
- 339 Ncm
- 50,000 cP
- 1/5 hp, 150 watts
- 60 litres

Versatile Efficient Unbeatable Quality



3030 Universal

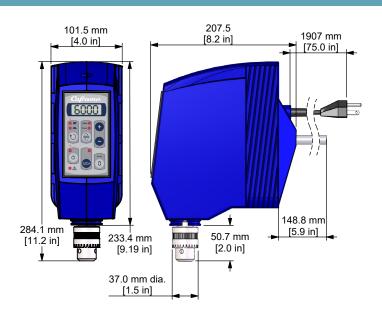

Features and Benefits:

2-Speed Transmission

- Smart automatic transmission selects high-torque or high-speed range
- Maintenance free
- Quiet, dependable

Digital Display

- Toggle between both speed and torque values
- Precise speed settings
- Accurate repeatability

Versatile

- · Wide speed range
- Adjustable chuck
- Through shaft

Applications:

- Personal care formulation
- Paints and coatings
- Raw material QC
- Pharmaceutical products
- Polymers and epoxies

Additional Specifications:

Input Power	120 volts, 60 Hz or 220-240 volts, 50/60 Hz
Motor	Brushless DC
Weight	6.82 kg
Display	Digital display, keypad
Mounting	12.5 mm dia support rod
Impeller Adjustment	Through shaft
Impeller Attachment	Keyed chuck, accepts shafts up to 10 mm dia
Includes	Calibration certificate, chuck, chuck guard, chuck key, sup- port rod and power cord
Approvals	CSA listed to Canada and US standards.
Warranty	Three years





1-800-567-3556 ext 248

CaframoLabSolutions.com

501273 Grey Road 1, Georgian Bluffs ON NOH 2TO Canada