

# Benchmark Scientific

## MULTI-THERM™ COOL - HEAT - SHAKE



- Temperature control from 0° to 100°C
- Exchangeable blocks, for tube sizes 0.2 to 50ml
- Precision contoured wells, for uniform thermal transfer
- Two models: heat/cool or heat only

### Technical Data:


Temp. Range (HC):	Ambient -20° to 100°C
Temp. Range (H):	Ambient +5° to 100°C
Heating Ramp Rate:	5.0°C / min.
Cooling Ramp Rate:	2.5°C / min. (HC only)
Temp. Accuracy:	+/-1.0°C
Speed Range:	200 to 1500 rpm, or "off"
Motion / Orbit:	Horizontally circular / 3mm
Capacity:	Per selected block
Dimensions:	8.25 x 11.5 x 8.25 in. 21 x 29 x 21 cm
Weight:	18lb. / 8kg
Electrical:	120V, 60Hz or 230V, 50-60Hz



The **MULTI-THERM** shaker is a temperature controlled vortexer, useful for a variety of molecular biology applications including:

- Denaturation of DNA, RNA and proteins
- Lipid extractions
- Yeast and bacteria cultivation
- Restriction digests
- Reverse transcription
- DNA/plasmid isolation
- Gentle thawing of biological materials

Despite its modest 8 x 11 in. footprint, all popular tubes and plates are compatible, including as many as six 50ml tubes. Speed, time and temperature settings are continuously visible on the LCD, simultaneously showing both actual and selected values. Integral over-temperature control ensures long life, safety and sample integrity.

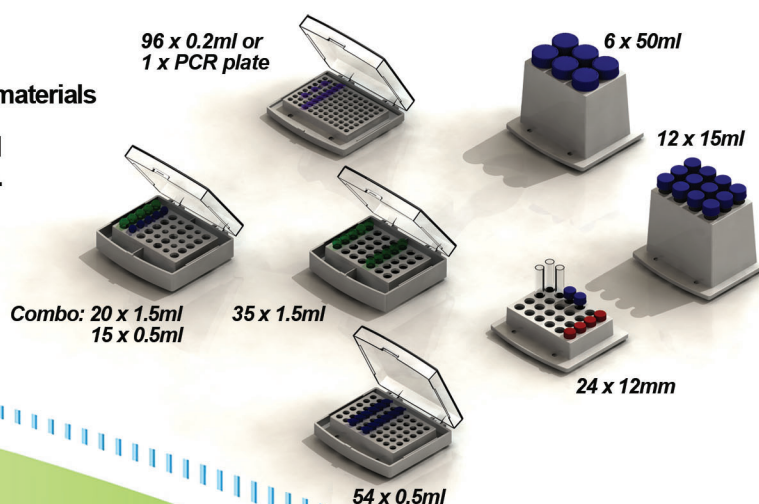

### Ordering Information:

H5000-HC MultiTherm Shaker with heating and cooling, 115V  
H5000-H MultiTherm Shaker with heating only, 115V

To order in 230V, please add (-E) to the end of the item number.

Please order blocks separately:

H5000-02	Block, 96 x 0.2ml or one PCR plate
H5000-05	Block, 54 x 0.5ml
H5000-CMB	Block, combination 15 x 0.5ml and 20 x 1.5ml
H5000-15	Block, 35 x 1.5ml
H5000-20	Block, 35 x 2.0ml
H5000-12*	Block, 24 x 12mm (200 to 1200rpm / Ambient -10° to 100°C)
H5000-150*	Block, 12 x 15ml (200 to 750rpm / Ambient -10° to 100°C)
H5000-500*	Block, 6 x 50ml (200 to 750rpm / Ambient -10° to 100°C)
H5000-5MT*	Block, 5ml centrifuge tubes (200 to 750rpm / Ambient -10° to 100°C)
H5000-MP*	Block, one Micro Plate (200 to 750rpm / Ambient -10° to 80°C)
H5000-DWMP*	Block, one Deep Well Micro Plate (200 to 750rpm / Ambient -10° to 80°C)
H5000-1232*	Block, 24 x 2ml HPLC/Autosampler vials (200 to 750rpm / Ambient -10° to 100°C)
H5000-025*	Block, 48 x 250 µl vial insert (200 to 750rpm / Ambient -10° to 100°C)
H5000-CU	Block custom drilled, for tubes/vials up to 40mm tall
H5000-VVB	Block, for liquids, beads, etc. (chamber: 4 x 2.6 x in.)

\* Note: The larger mass of this block results in a reduced speed and temperature range.

**Benchmark Scientific Inc.**  
PO Box 709 - Edison, NJ 08817  
Phone: 908-769-5555  
Fax: 732-313-7007  
Web: [www.BenchmarkScientific.com](http://www.BenchmarkScientific.com)  
Email: [Info@BenchmarkScientific.com](mailto:Info@BenchmarkScientific.com)