

## HYDRA

### HYDRA - HIGH CAPACITY

HYDRA SERIES, TYPE II POU WATER SYSTEMS

**HIGH CAPACITY  
GENERAL DEIONIZATION  
INDUSTRIAL & LABORATORY**

The Hydra High Capacity DI System is a pre-assembled cartridge system that provides deionized water using a staged filtration process. Water purification is provided using a 3-step process. Stage (1) removes particles greater than 5 micron, chlorine, and organics. Stages (2 & 3) are deionizers designed to remove dissolved minerals. The Hydra High Capacity DI series includes all cartridges and resistivity light for a total turnkey system. Designed for less corrosive applications, the Hydra high capacity DI configuration provides water quality better than 50 kΩ·cm . This is ideal for scale reduction and non-stainless steel piping systems.



#### HIGHLIGHTS

- Wall Mounted and Low Profile
- Water Quality Light Indicating Cartridge Replacement
- Economically Produces DI Water
- Turnkey System For On Demand Service
- Designed For City Water & Tap Water Supply
- Outlet Isolation Valve
- Spanner Wrench & Associated Tubing Provided

#### SYSTEM SPECIFICATIONS

Pressure: 20 – 90 PSIG (changed values)

Temperature: 100° F Max

Voltage: 120 V

Connections:

Inlet – 3/8" OD Tubing

Outlet – 1/2" Hose Barb

Materials:

Housing – Polypropylene

Bracket – Painted Steel

#### APPLICATIONS

- Environmental chambers
- Sterilizers
- Ultrasonic cleaners
- Chiller loops

Revision 1.0

© 2020 ResinTech, Inc.



## HYDRA DI CAPACITY

FEEDWATER TOTAL DISSOLVED SOLIDS (TDS AS CaCO <sub>3</sub> )	HYS-122-S-HC (Gallons)	HYS-122-B-HC (Gallons)
10 ppm*	2,650	6,800
300 ppm	90	225


\* Typical water quality with reverse osmosis pretreatment.

## ORDERING GUIDE

BOWL DIAMETER	SHIPPING WEIGHT	PART NUMBER (Legacy Part Number)	REPLACEMENT KIT PART NUMBER (Legacy Part Number)	REPLACEMENT RESISTIVITY LIGHT 20 kΩ•cm
2.5"	24 lbs.	<b>HYS-122-S-HC</b> (HY-122-DI-HC)	<b>HYK-122-S-HC</b> (HYK-009)	<b>CL-20K-50</b>
4.5"	55 lbs.	<b>HYS-122-B-HC</b> (HY-122B-DI-HC)	<b>HYK-122-B-HC</b> (HYK-010)	<b>CL-20K-50</b>

## SPECIFICATIONS

PART NUMBER (as Listed on Website)	DIMENSIONS (H X W X D)	FLOW RATE	TOTAL CAPACITY GRAINS AS CaCO <sub>3</sub>	TYPICAL EFFLUENT
<b>HYS-122-S-HC</b>	25"x 20"x 6"	0.5 gpm	2,160	50 50 kΩ•cm
<b>HYS-122-B-HC</b>	26"x 29"x 9"	1.25 gpm	5,710	50 kΩ•cm

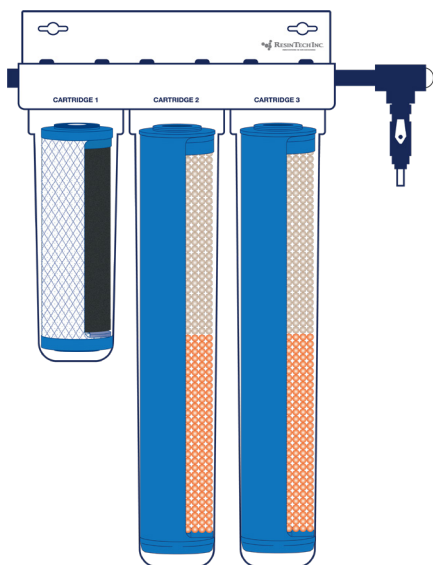

	CARTRIDGE 1	CARTRIDGE 2	CARTRIDGE 3
<b>DESCRIPTION</b>	Carbon Block	Deionization	Deionization
<b>PART NUMBER</b>	CB-10-6305-TO CB-10-6305-BB-TO	AF-20-4223 AF-20-4223-BB	AF-20-4223 AF-20-4223-BB
<b>DIMENSIONS</b>	2.5" X 10" BB: 4.5" X 10"	2.5" X 20" BB: 4.5" X 20"	2.5" X 20" BB: 4.5" X 20"

Revision 1.0

© 2020 ResinTech, Inc.

