

Product datasheet

Captair 392

Ductless filtering fume hood

Safer to operate

- Erlab's advanced carbon filtration technology and/or HEPA/ULPA accommodates your specific needs
- Meets AFNOR NF X 15 211/ANSI Z9.5-2012 filtration efficiency standard (class 1 and 2)
- Sensors that detect filter breakthrough of solvents, acids or formaldehyde
- Safety back up filter in case of main filter saturation
- Continuous monitoring of Air face velocity
- Erlab Safety Program: application analysis and validation, usage certification, filter change reminders

Simpler to use

With Smart Technology, you can easily see that the hood is operating safely. Should the light pulse you are notified that:

- Containment has been compromised or,
- The filter has breakthrough or,
- There is a Fan failure

Flexibility

- The configurable filtration column will accommodate application changes
- No ductwork needed. This allows you to move the hood anywhere.

Savings

- No ductwork cost
- Annual energy costs decreases significantly
- Energy savings outweigh filter replacement costs.

Environment


- No dangerous chemical released into the atmosphere
- Low energy consumption




Ask for the highest level of filtration performances



Smart Technology keeps you safe.

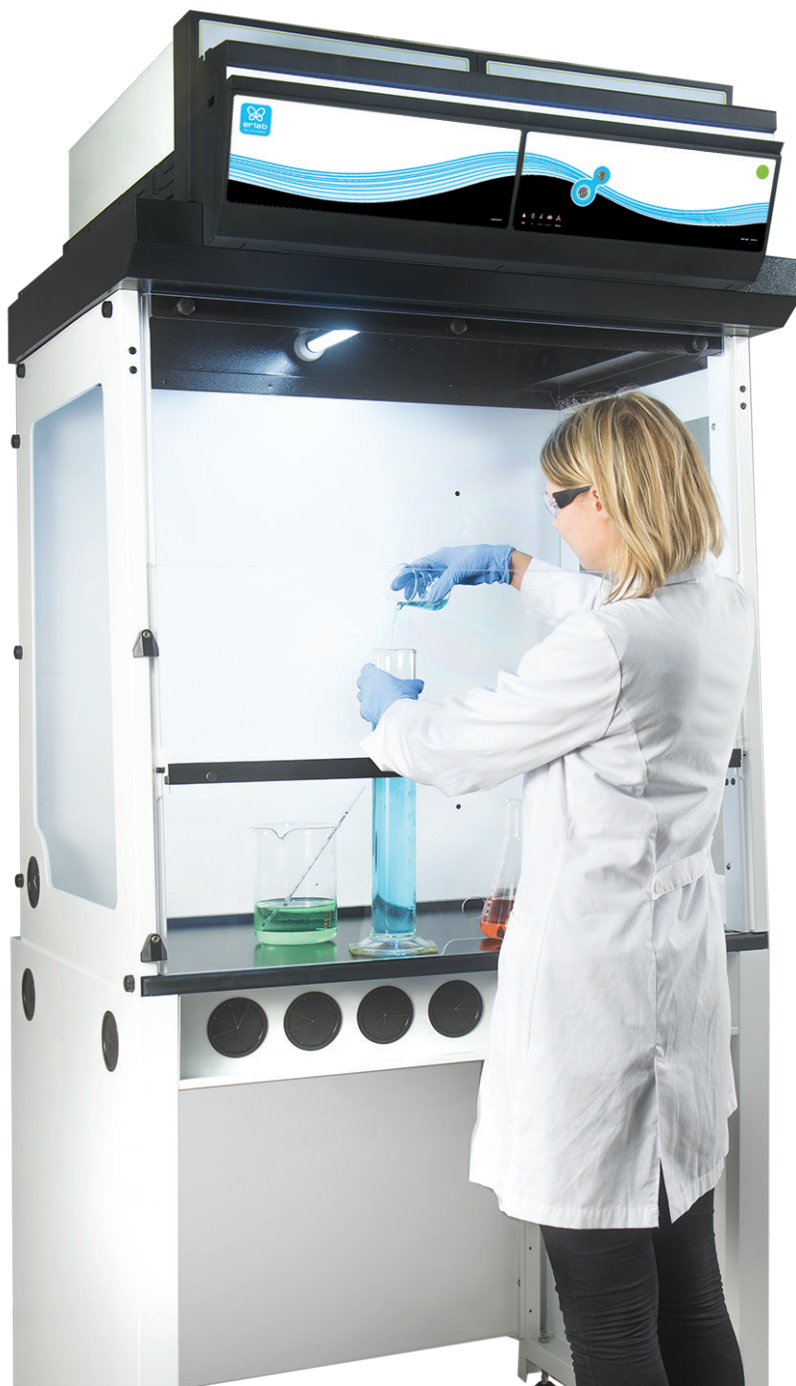

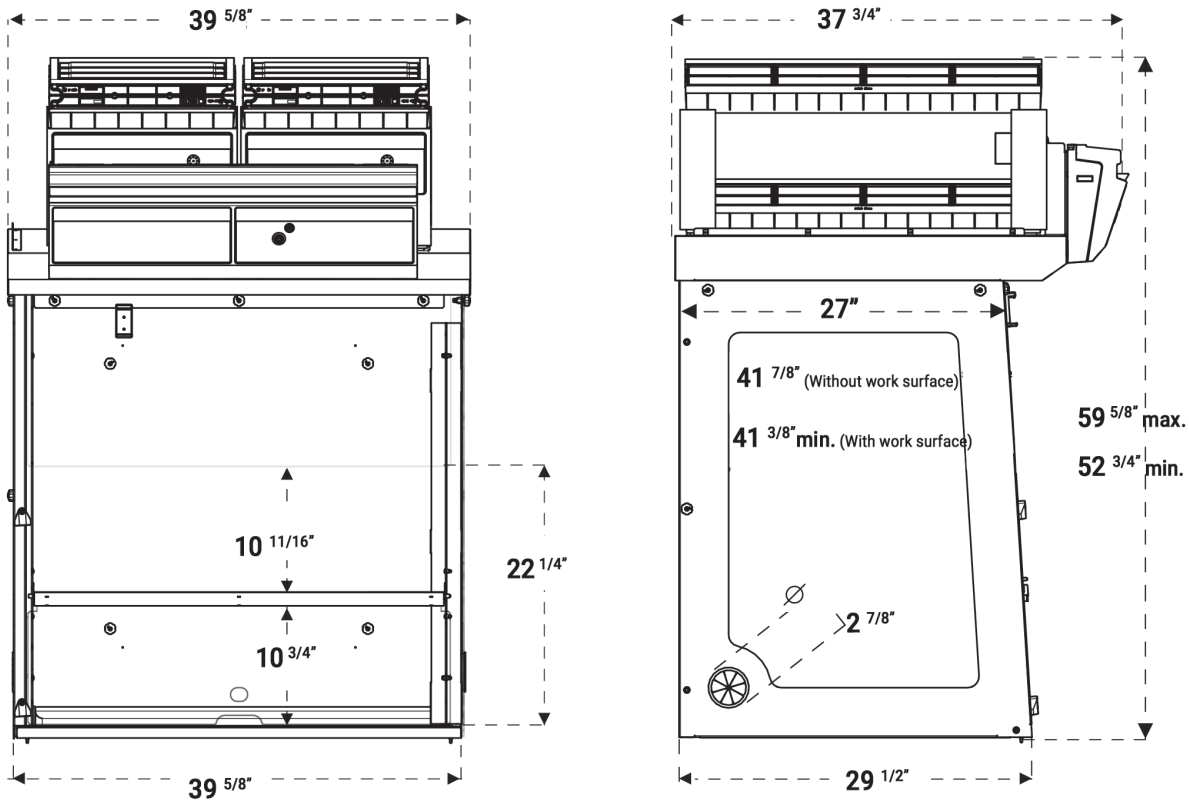


Heights according to the filtration column configuration


| | | |
|-------------------------|-------------------|---|
| Type 1C or 1P | $52 \frac{3}{4}"$ | Please add $5 \frac{3}{4}"$ between the last filter and the ceiling to allow a good air recirculation and to replace filters easily |
| Type 2C or 1P1C or 1C1P | $56 \frac{1}{2}"$ | |
| Type 1P2C or 1P1C1P | $59 \frac{5}{8}"$ | |

Work surfaces with built in spill tray


Tempered glass. Retention volume (6L)

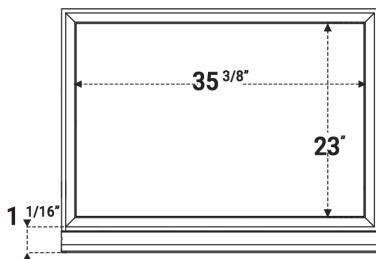


TRESPA® TOPLAB^{PLUS} Retention volume (6L)




304 L stainless steel. Retention volume (14L)



Benchcap: fixed work bench







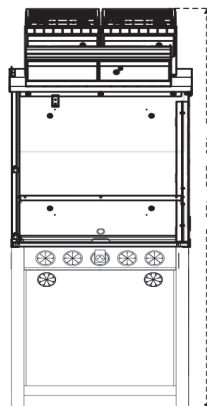


Mobicap : mobile rolling cart

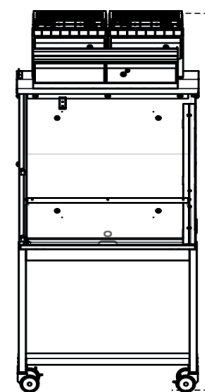



Designed with you in mind: Our filtration column can be configured for your specific application requirements.

| | | Products handled / Applications | | | |
|------------------------------|--------------------------------------|--|--|--|--|
| | | Liquid chemicals handlings | Powders handlings | Liquid chemicals and powders handlings | Liquid chemicals handlings in clean room |
| Customized filtration column | Class 1 according to the NF X 15-211 |  Maximum protection | NA |  Maximum protection |  Maximum protection |
| | Class 2 according to the NF X 15-211 |  1C |  1P |  1P1C |  1C1P |

Available filters :



Carbon filtration for gases and vapours
AS:For organic vapours
BE+:Polyvalent for acid + organic vapours
F:For formaldehyde vapours
K:For ammonia vapours



Particulate filtration for powders
HEPA H14:99.995 % efficiency filtration of particles over 0.1 µm in size
ULPA U17:99.999995 % efficiency filtration of particles over 0.1 µm in size



• **Molecode**
Automatic alarm to detect a filtration fault

| | |
|------------------------------|---|
| Safety Standards | AFNOR NF X 15-211:2009: France - BS 7989: England DIN 12 927:Germany - EN 1822:1998 (HEPA H14 & ULPA U17 Filters) - CE Marking |
| Air Flow | 440 m3/h - 259 CFM |
| Air Face Velocity | 0.4 to 0.6 m/s - 79 fpm to 118 fpm |
| Voltage/Frequency | 90-220 V / 50-60 Hz |
| Power consumption | 105 W |
| Sash openings | Reverso sash |
| Structure | Corrosion resistant electro-galvanized steel coated with anti-acid polymer |
| Side and front panels | Chemical resistant acrylic |
| Filtration module | Polypropylene |

Equipment

| | |
|--|--|
| Communication interface | Simple communication by audible and light pulses: air face velocity, automatic alarm to detect a filtration fault, ventilation settings, fan failure alarm |
| Filtration technology | 2 columns that can be configured to handle liquids, powders, or both |
| Carbon filtration for gases and vapours | Following filtration column configuration (see table above) |
| Particulate filtration for powders | Following filtration column configuration (see table above) |
| Internal lighting | LED lighting > 650 Lux |
| Anemometer | Air face velocity alarm |
| Chemical Listing | List of approved chemicals |

Accessories

| | |
|-------------------------------|--|
| Work Surfaces | Tempered glass / TRESPA® TOPLAB ^{PLUS} |
| Molecode | Detection sensor for : Type S, for solvents / Type A, for acids / Type F, for formaldehyde |
| Benches | Mobile (Mobicap) or fixed (Benchcap) |
| Particulate Pre-filter | Protects the main filter(s) from dust |
| Transparent Back Panel | Clear acrylic panel for easy viewing |



The Erlab Research and Development laboratory

About Erlab

Since 1968, **Erlab** has been a specialist, inventor and world leader in **ductless, zero-emission filtering fume hoods for laboratories** to provide total safety in chemical handling.

1 Erlab filtration

We provide technologies to protect laboratory staff from inhaling chemicals. This is made possible thanks to our Research and Development (R&D) department, which has continuously improved our filtration technology for more than 50 years. That's why, in 2009, we invented the ERLAB ABOVE label for tried and tested filtration technology.

2 The AFNOR NF X 15-211: 2009 standard


Erlab's filtration technology conforms to the NF X 15-211: 2009 standard, the industry's most demanding standard for molecular filtration, developed by a committee of independent scientists and specialized manufacturers.

This text imposes performance criteria linked to:


- Filtration efficiency
- Containment efficiency
- Air face velocity
- Documentation: chemical listing

3 The ESP program

A set of three services included with the purchase of each device designed to ensure your safety.

 **eValiQuest** Risk analysis – Determination of protection needs – Determination of ergonomic needs.

 **ValiPass** Certified installation – Total safety for handling.

 **ValiGuard** Ongoing monitoring – Preventative and maintenance inspections – Device reconfiguration based on protection needs – Development of handling.

4 Flex technology

The combination of molecular and particulate filtration technologies allows a single device to meet laboratories' protection needs. This innovation from Erlab's R&D department offers unprecedented flexibility, versatility and value. A single device can be reconfigured over time and easily reassigned to other applications.

5 Smart technology

Smart technology is a simple and innovative means of communication that improves safety. This technology uses a light and sound signal to indicate the user's level of protection. The advantages of the technology are:

- 1/ Light pulsation: Real-time communication via LED light pulses intuitively alerts the user to the device's operating status.
- 2/ Simplicity: One-touch activation.
- 3/ Detection system: The exclusive detection system continuously monitors filtration performance.
- 4/ Built-in monitoring: This service provides direct access to the status, settings and history of your device.