



Temperature range (MLR-352)

0°C to +50°C (Light OFF)

+10°C to +50°C (Light ON)

Lighting range

0 lx to 20,000 lx

(Adjustable)

Humidity range (MLR-352H only)

60% RH to 90% RH (Light OFF)

55% RH to 85% RH (Light ON)

Versatile Plant Growth Chambers

- Suits a wide range of applications
 - Culture of plant cells, tissues and organs
 - Acclimation and rearing of plants
 - Incubation and rearing of insects*
- Graphic LCD provides easier operation
- Programmable temperature, lighting and humidity functions (MLR-352H)
- Microprocessor PID control and Refrigeration Capacity Control
- Data logging function

*The surface of the cooling device may rust by the excrement of the insects when putting many insects in the chamber. We recommend frequent maintenances.

MLR-352H


MLR-352/MLR-352H

The wide variety of temperatures and lighting patterns that are essential in plant research can now be accurately reproduced and controlled. And you get humidity control* too! (*MLR-352H only)

Features


- Microprocessor PID and Refrigeration Capacity Control eliminate temperature fluctuations and thereby improve temperature control. This allows superior precision experiments plus energy and electricity savings.
- Programmable temperature function is perfect for temperature cycle and vernalization treatment research.
 - 12-step programs x 10 patterns can be memorized.
 - Selectable clock mode or timer mode
 - Multiple programs can be linked (Join mode).
 - Starting day and time of operation can be programmed.
- Operation data of approximately last 2 weeks (6-minute intervals) can be automatically recorded.
 - Data can be retrieved on the control panel.
 - Data can be transmitted to a PC (CSV data via Ethernet (LAN) Interface MTR-L03 or RS232C/RS485 Interface MTR-480).
 - Easy calibration: temperature and humidity can be calibrated easily from the control panel.
- Small and lightweight, high-molecular membrane-type humidity sensor also boasts a high degree of accuracy and reproducibility. Of the newest high-molecular membrane type, the humidity sensor accurately measures chamber humidity (MLR-352H only).

Dimensions (MLR-352H) Unit: mm (inch)

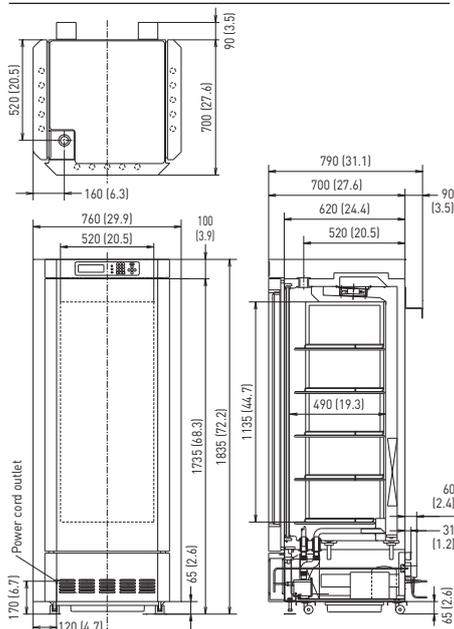

Control Panel


Graphic LCD panel with pop-up menu function on control panel provides more visual display and allows intuitive operation.

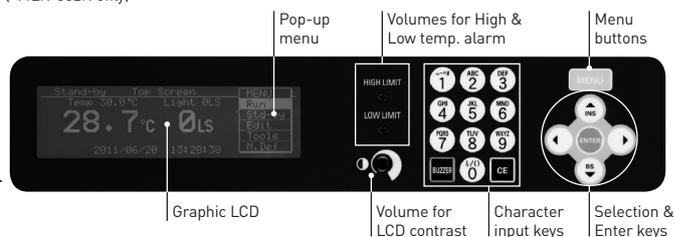

Program Setting Screen


1. Selection of menu

Temperature light and humidity pages scroll with down key

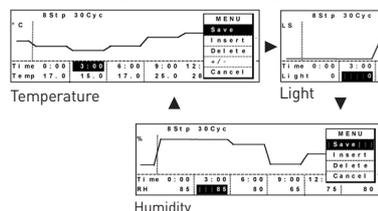

2. Various ways of starting programs

Selection from Clock mode & Timer mode. Setting of Join mode and Start time available.



3. Data logging function

Operation data can be recorded



Specifications

| | Model No. | |
|--|---|---|
| 220 V, 50 Hz | MLR-352-PB | MLR-352H-PB |
| 220 V, 60 Hz | MLR-352-PK | MLR-352H-PK |
| 230 V/240 V, 50 Hz (CE) | MLR-352-PE | MLR-352H-PE |
| External dimensions (W x D x H)*1 | 760 x 700 x 1835 (mm) / 29.9 x 27.6 x 72.2 (inch) | |
| Internal dimensions (W x D x H) | 520 x 490 x 1135 (mm) / 20.5 x 19.3 x 44.7 (inch) | |
| Effective capacity | 294 litres (10.4 cu.ft.) | |
| Shelves | PE coated steel wire, 4 pcs. Inner dimensions: W465 x D450 (mm) / 18.3 x 17.7 (inch), Maximum load: 25 kg/shelf PE coated steel wire with stainless steel cover, 1 pc. (bottom) Inner dimensions: W355 x D395 (mm) / 14.0 x 15.6 (inch), Maximum load: 25 kg/shelf | |
| Access port | 40 mm diameter x 1 (chamber top position) | |
| Casters | 4 | |
| Air circulation | Forced air circulation | |
| Compressor | Hermetic type, 200 W | |
| Heater | 334 W | 381 W |
| Defrost | Automatic defrost (2 patterns in MLR-352, 3 patterns in MLR-352H), Manual defrost | |
| Option | Data acquisition system: MTR-5000-PW / MTR-L03-PW or MTR-480-PW | |
| Net weight (approx.) | 226 kg (498 lbs.) | 235 kg (518 lbs.) |
| Control related specifications | | |
| Temperature control range (AT 20°C, no load) | 0°C to +50°C (light off) +10°C to +50°C (light on) | +5°C to +50°C (light off) +10°C to +50°C (light on) |
| Temperature distribution | ±3.5°C (light on), ±1.5°C (light off) (AT 20°C, no load) ±2.5°C (light on), ±1.0°C (light off) (Set temperature 25°C, AT 20°C, no load) | |
| Temperature fluctuation | ±0.3°C [Set temperature 25°C, AT 20°C, no load] | |
| Temperature control | Microcomputer PID and Refrigeration capacity control | |
| Lighting range | 0 lx to 20,000 lx Fluorescent lamp 40 W x 15, 6 increments (0, 1, 2, 3, 4, 5) | |
| Humidity | N/A | Ultrasonic humidifier PID control |
| Humidity control range | N/A | 60% RH to 90% RH (+15°C to +45°C and light off) 55% RH to 85% RH (+15°C to +45°C and light on) |
| Program function | Temperature and light Temperature, light and humidity | |
| Data logging function | 12-step repeat from 1 — 98 times or unlimited. Max. 10 programs memorized. Clock mode, Timer mode and Join mode available, Start date and time reservation function Up to approx. 14 days with 6-minute intervals (record cannot be logged during a power failure), The daily information can be shown in graph display. (Older data will be overwritten automatically when memory becomes full.) | |
| Real time clock | Battery back-up for clock function | |
| Analog output for recording | 0mV to 100mV / Temperature: 0°C to +50°C / Light: 0 to 5 / Humidity: 0% RH to 100% RH | |
| Alarms and safety | Temperature alarm, High and low temperature limit, Humidity alarm | |

Caution: PHC Corporation guarantees the product under certain warranty conditions. PHC Corporation is in no way shall be responsible for any loss of content or damage to content.
• Appearance and specifications are subject to change without notice.
*1 External dimensions of main cabinet only - see dimension drawings showing handles and other external projections.



Preservation (freezers, refrigerators) and Culturing (incubators) Equipment
The management of the design, development, production, sales support, and servicing of the above.
PHC Corporation, Biomedical Division
1-1-1 Sakada, Oizumi-machi, Ora-gun, Gunma 370-0596, Japan



PHC Corporation Biomedical Division is certified for:
Environmental management system: ISO14001

DISTRIBUTED BY:

phcbi
PHC Corporation

<https://www.phchd.com/global/biomedical/>

Printed in Japan 4201-2018-04-BB