


GEB Robotic Tips, compatible with Rainin® LTS® pipettes, can be used in proteomics, drug development, genomics and other fields.

Product details at-a-glance

GEB Cat#	Max Volume	Tip Color	Low Retention	Sterilized	Filtered (1.8*3.5)mm	Packaging Spec.
AT010R-B-N	10ul	Natural				1000 tips/bag, 20bags/case, 20000tips/case.
AT010R-B-N-LB	10ul	Natural	Low Retention			
Case dimension L*W*H:455* 270*265mm			Gross Weight: 3.2kg			
AF010R-B-NS	10ul	Natural		Sterilized	Filtered	1000 tips/bag,10bags/case, 10000tips/case.
AF010R-B-NS-LB	10ul	Natural	Low Retention	Sterilized	Filtered	
Case dimension L*W*H:450* 270*190mm			Gross Weight: 2.0kg			
AT010R-9-N	10ul	Natural				96 tips/rack, 10 racks /pack, 5packs/ case.50 racks/case, 4800tips/case.
AT010R-9-N-LB	10ul	Natural	Low Retention			
AT010R-9-NS	10ul	Natural		Sterilized		
AT010R-9-NS-LB	10ul	Natural	Low Retention	Sterilized		
AF010R-9-NS	10ul	Natural		Sterilized	Filtered	
AF010R-9-NS-LB	10ul	Natural	Low Retention	Sterilized	Filtered	
Case dimension L*W*H: 480*345*280mm			Gross Weight: 7.32kg			
AT010R-E-N	10ul	Natural				96 tips/rack,10 stacks /bag, 10bags/case. 9600tips/case.
AT010R-E-N-LB	10ul	Natural	Low Retention			
Case dimension L*W*H:455* 270*265mm			Gross Weight: 6.3kg			
AF010R-R-NS	10ul	Natural		Sterilized	Filtered	96 tips/rack, 10 racks /pack, 5packs/ case.50 racks/case, 4800tips/case.
AF010R-R-NS-LB	10ul	Natural	Low Retention	Sterilized	Filtered	
AT010R-R-N-LB	10ul	Natural	Low Retention			
Case dimension L*W*H:500* 265*450mm			Gross Weight: 8.2kg			

- ✧ 10µL Natural Tips
- ✧ 96 Tip/Hanging Tip Rack format/Blut
- ✧ Polypropylene
- ✧ Certified DNase/RNase free
- ✧ Nonpyrogenic
- ✧ Presterile/Nonsterile
- ✧ Filtered (Filtered With aerosol-resistant filters) /NonFiltered
- ✧ Endotoxin-Safe meets USP/FDA standards
- ✧ Comply With USP 3127 (Heavy Metal Contamination) standards
- ✧ Compatible with Rainin® LTS® pipettes.

Drawing: Reference tolerance table for unmarked tolerance

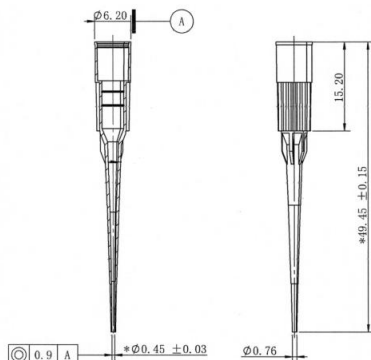

Select	± A	± B	± C
0-6	0.02	0.05	0.10
>6-30	0.05	0.10	0.15
>30-60	0.10	0.15	0.20
>60-120	0.15	0.20	0.25
>120-180	0.20	0.25	0.30
>180-300	0.25	0.30	0.35