

Document Your Results Fast and Reliable



Fast and reliable

Whether you deal with simple or sophisticated applications, the printer generates fast and clear hard copies of your results.



Print in your language

The Compact Printer supports the connected instrument languages, whether it operates in English, Russian, Chinese (balance), Japanese or in any other language.



Choose the right model

Choose RS-P25 / USB-P25 for simple printouts, or RS-P28 with the extended Statistics and Totaling applications.



Auto settings detection

The Printer automatically detects the settings of the connected device. Thanks to this feature no manual setting changes are required.





USB-P25, RS-P25, RS-P28 Compact Printer Range

No matter which METTLER TOLEDO instrument is connected, you will always obtain a printout that meets the quality standards. Handwritten entries in laboratory journal notebooks are time consuming and can be a source of transcription errors. Records on the METTLER TOLEDO normal and adhesive printer paper help to avoid such mistakes. The printouts can be archived and at any time provide proof of the original weighing data.


The compact printer range of METTLER TOLEDO

Dimension (mm)

| | | |
|--|---|---|
| |  |  |
| Model | RS-P25 (Th. #1228M43) USB-P25 (Th. #1228M44) | RS-P28 (Th. #1228M45) |
| Print Application | • | • |
| Auto Settings Detection | • | • |
| Built-in real-time clock Zero/Tare key | — | • |
| Statistic application Totalling application | — | • |
| Interface | RS232 / USB | RS232 |



| | |
|-------------------------------|---|
| Printer unit | Dot matrix printer |
| Ribbon cartridge | Exchangeable, black ink |
| Print format | 5 x 7, 24-character line length |
| Print speed | 2.3 lines per second |
| Paper roll | Standard paper 57.5 mm (W), max. Ø 60 mm |
| Print quality | Thermally stable and lightfast paper (GxP) |
| Print unit durability | 1,5 million lines |
| Power line voltage, frequency | Internal power supply, 100-240 VAC, 50/60 Hz |
| Power consumption | 150 mA (100V), 60 mA (240V) |
| Interface | RS232C, 9pin male connector or USB |
| Altitude | Up to 4000 m |
| Operating temperature | 0 - 40 °C |
| Relative humidity | Max., 80% at 31 °C, linear decreasing to 50% at 40 °C, noncondensing |
| Over voltage category | Class II |
| Pollution degree | 2 |
| Included in delivery | Power cable (country specific) Interface cable Paper roll (1 pcs) Ribbon cartridge (1 pcs) |
| Dimensions | 120 mm x 203 mm x 73 mm (WxDxH) |
| Net weight | 740 g (paper roll included) |

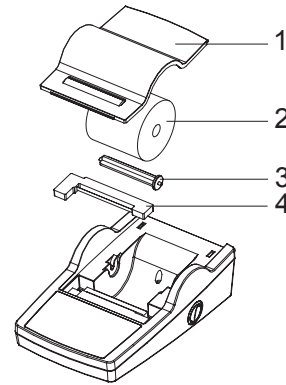

| Pos. | Item | Part number | Delivery Quality |
|------|-----------------------------------|-------------|------------------|
| 1 | Paper cover | 12120734 | 1 pcs |
| 2 | Paper roll 57.5 x Ø 50 to 60mm | 12120799 | 2 pcs |
| 3 | Paper rotary axis | 12120735 | 1 pcs |
| 4 | Ribbon cartridge, black | 12120798 | 1 pcs |
| | RS9 M/F Cable, 1.5m | 11101051 | 1 pcs |
| | RS9 F/F Cable | 51190362 | 1 pcs |
| | USB Cable 1m | 12130716 | 1 pcs |
| | Paper roll, self-adhesive | 11600388 | 1 pcs |



Quality certificate ISO 9001
Environment certificate ISO 14001

Subject to technical changes
©08/2008 Mettler-Toledo AG

www.thomassci.com

For more information